





## RBH 1802 F

(Avec option pompe mixte)

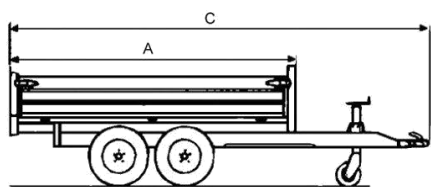



### Options:

- Roue de secours + support
- Rehausses grillagées Ht: 800 mm
- Rampe de chargement + Béquilles
- Pompe électrique
- Tri-benne
- Etc...Voir tarifs

TYPE	P.T.C.	P.V.	C.U.	Essieu(x)	A	B	C	D	E	Roues
RBH 1051	1600 kg	550 kg	1050 kg	1 x 1600 kg	2.50 m	1.63 m	4.05 m	0.78 m	1.36 m	185 R 14 C
RBH 1352	2000 kg	650 kg	1350 kg	2 x 1100 kg	3.10 m	1.63 m	4.65 m	0.78 m	1.36 m	185 / 70 R 14
RBH 1802	2500 kg	700 kg	1800 kg	2 x 1300 kg	3.10 m	1.63 m	4.65 m	0.78 m	1.36 m	185 R 14 C
RBH 2502	3200 kg	700 kg	2500 kg	2 x 1600 kg	3.10 m	1.63 m	4.65 m	0.78 m	1.36 m	185 R 14 C
RBH 2702	3500 kg	800 kg	2700 kg	2 x 1800 kg	3.10 m	1.73 m	4.65 m	0.81 m	1.36 m	215 R 14 C

## BMS 992 F

(Avec option pompe mixte)

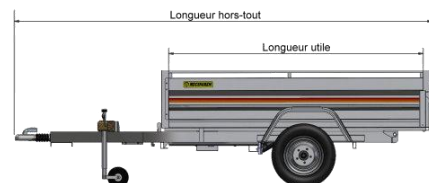

### Options:

- Roue de secours + support
- Rehausses grillagées Ht: 800 mm
- Rampe de chargement + support
- Pompe électrique

TYPE	P.T.C.	P.V.	C.U.	Essieu(x)	Dim. utiles	Dim. hors-tout	Roues
BMS 421	750 kg	330 kg	420 kg	1 x 750 kg	2.53 x 1.36 m	3.90 x 1.96 m	165 / 70 R 14
BMS 371 F	750 kg	380 kg	370 kg	1 x 900 kg	2.53 x 1.36 m	4.00 x 1.96 m	165 / 70 R 14
BMS 521 F	900 kg	380 kg	520 kg	1 x 900 kg	2.53 x 1.36 m	4.00 x 1.96 m	165 / 70 R 14
BMS 701 F	1100 kg	400 kg	700 kg	1 x 1300 kg	2.53 x 1.36 m	4.00 x 1.96 m	185 / 70 R 14
BMS 911 F	1300 kg	400 kg	900 kg	1 x 1300 kg	2.53 x 1.36 m	4.00 x 1.96 m	185 R 14 C
BMS 981 F	1400 kg	420 kg	980 kg	1 x 1600 kg	2.53 x 1.36 m	4.00 x 1.96 m	185 R 14 C
BMS 1181 F	1600 kg	420 kg	1180 kg	1 x 1600 kg	2.53 x 1.36 m	4.00 x 1.96 m	185 R 14 C
BMS 622 F	1100 kg	480 kg	620 kg	2 x 750 kg	2.53 x 1.36 m	4.00 x 1.96 m	145 / 70 R 13
BMS 722 F	1200 kg	480 kg	720 kg	2 x 750 kg	2.53 x 1.36 m	4.00 x 1.96 m	145 / 70 R 13
BMS 822 F	1300 kg	480 kg	820 kg	2 x 750 kg	2.53 x 1.36 m	4.00 x 1.96 m	145 / 70 R 13
BMS 892 F	1400 kg	510 kg	890 kg	2 x 900 kg	2.53 x 1.36 m	4.00 x 1.96 m	155 / 70 R 13
BMS 992 F	1500 kg	510 kg	990 kg	2 x 900 kg	2.53 x 1.36 m	4.00 x 1.96 m	155 / 70 R 13