

PORTE VOITURES



PV 1502 Export

(Avec option treuil de halage)

Options:

- Roue de secours + support
- Treuil de halage
- Cales de roues supplémentaires
- Remplissage central tôle ou bois


TYPE	P.T.C.	P.V.	C.U.	Essieu(x)	A	B	C	D	E	Roues
PV 901 Export	1300 kg	490 kg	810 kg	1 x 1300 kg	3.50 m	1.60 m	5.10 m	1.90 m	2.46 m	185 R 14 C
PV 1201 Export	1600 kg	490 kg	1110 kg	1 x 1600 kg	4.00 m	1.60 m	5.60 m	1.90 m	2.46 m	185 R 14 C
PV 1252 Export	1700 kg	525 kg	1175 kg	2 x 900 kg	4.00 m	1.60 m	5.60 m	1.90 m	2.43 m	165 / 70 R 13
PV 1502 Export	2000 kg	600 kg	1400 kg	2 x 1300 kg	4.00 m	1.60 m	5.60 m	1.90 m	2.43 m	185 / 70 R 13
PV 1902 Export	2500 kg	610 kg	1890 kg	2 x 1300 kg	4.00 m	1.60 m	5.60 m	1.90 m	2.43 m	165 R 13 C



PV 1602

Options:

- Roue de secours + support
- Timon articulé TZ
- Remplissage central tôle ou bois
- Paire de cales de roues supplémentaires

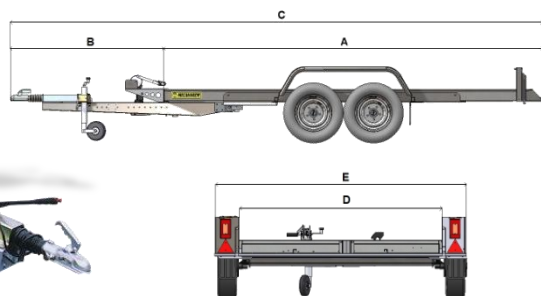

TYPE	P.T.C.	P.V.	C.U.	Essieu(x)	Treuil	Basc.	A	B	C	D	E	Roues
PV 321	750 kg	320 kg	430 kg	1 x 750 kg	non	M	3.00 m	1.30 m	4.30 m	1.50 m	2.00 m	155 / 70 R 13
PV 901	1300 kg	400 kg	900 kg	1 x 1300 kg	non	M	3.50 m	1.50 m	5.00 m	1.90 m	2.45 m	185 R 14 C
PV 911	1300 kg	450 kg	850 kg	1 x 1300 kg	non	M	3.50 m	1.50 m	5.00 m	1.90 m	2.35 m	155 / 70 R 12
PV 1101	1600 kg	500 kg	1100 kg	1 x 1600 kg	oui	H	4.50 m	1.50 m	6.00 m	1.90 m	2.45 m	185 R 14 C
PV 1602	2200 kg	720 kg	1480 kg	2 x 1100 kg	oui	H	4.50 m	1.60 m	6.10 m	1.90 m	2.45 m	185 / 70 R 14
PV 1902	2500 kg	795 kg	1705 kg	2 x 1300 kg	oui	H	5.00 m	1.60 m	6.60 m	1.90 m	2.45 m	185 R 14 C
PV 2202	3000 kg	850 kg	2150 kg	2 x 1600 kg	oui	H	5.00 m	1.60 m	6.60 m	1.90 m	2.45 m	185 R 14 C
PV 2602	3500 kg	900 kg	2600 kg	2 x 1800 kg	oui	H	5.00 m	1.60 m	6.60 m	1.90 m	2.50 m	215 R 14 C

Options:

- Roue de secours + support
- Timon articulé TZ
- Paire de cales de roues supplémentaires
- Treuil électrique



PV 1452 F

TYPE	P.T.C.	P.V.	C.U.	Essieu(x)	A	B	C	D	E	H/Sol	Roues
PV 1452 E	2200 kg	850 kg	1350 kg	2 x 1100 kg	5.00 m	1.65 m	6.65 m	1.90 m	2.00 m	0.66 m	155 / 70 R 12
PV 1852 E	2500 kg	900 kg	1600 kg	2 x 1300 kg	5.00 m	1.65 m	6.65 m	1.90 m	2.00 m	0.66 m	155 / 70 R 12
PV 2302 E	3200 kg	1000 kg	2200 kg	2 x 1600 kg	5.00 m	1.65 m	6.65 m	1.90 m	2.00 m	0.66 m	155 / 70 R 12
PV 2602 E	3500 kg	1100 kg	2400 kg	2 x 1800 kg	5.00 m	1.65 m	6.65 m	1.90 m	2.00 m	0.82 m	215 R 14 C